

# “Dora RGBW” 24 V LED Circuit Board

Dora is a 24 V circuit board for RGB colour-changing applications.


In addition to the RGB LEDs, the circuit board is equipped with white LEDs.

The LEDs are spaced at 22 mm intervals.


The 8 mm wide circuit board is flexible, i.e. it can be bent to a large extent and twisted slightly.

The circuit board has an overall length of 264 mm. It can be extended (using the soldering pads) or split into shorter sections at the marked points.



The shortest possible length is 132 mm.

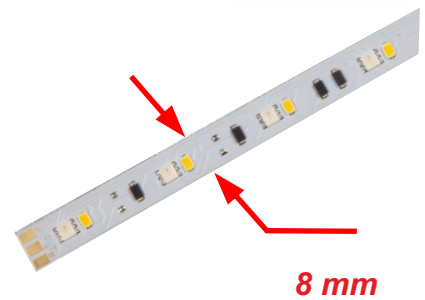

8 mm

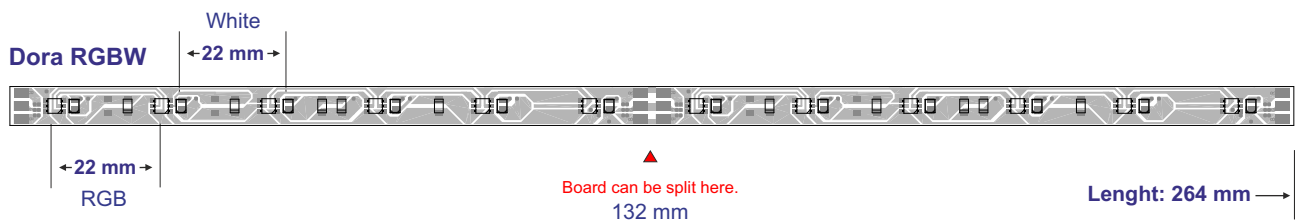

### Connection

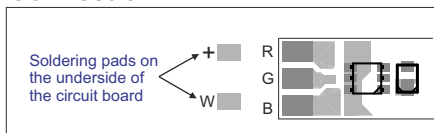

Type	Dora RGBW 22 mm
Art.-no.	5 7000 850

### Technical data

Type	Dimensions	LED spacing	No. of LEDs	Splittable ever	Luminous flux per m	Wattage		max. connectable length per power supply
						per board	per metre	
Dora RGBW 22 mm	264 x 8 mm	22 mm	24	132 mm	860 lm	4.1 W	15.5 W	3.96 m



Technical modifications reserved. Content is protected by copyright.

February 2019 L167e/02/2019