
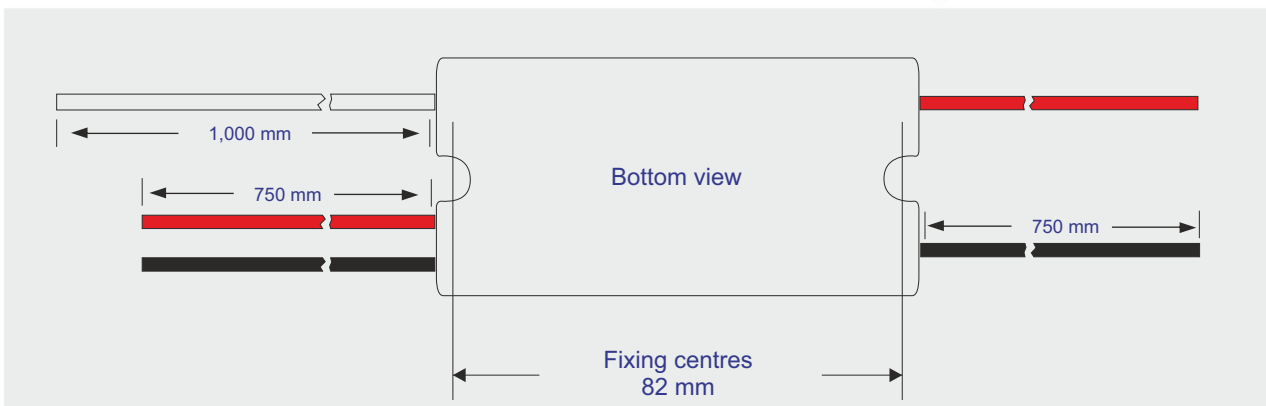
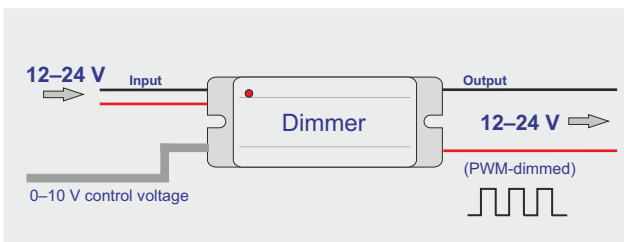


Dimmer 12/24 V, 150 W controllable via 0–10 V

General data:	
Degree of protection	IP67
Class of protection	III
Conformity	CE
Operating temperature	-25 °C to +65 °C
Operating mode	Constant voltage / PWM
Article number	5 1202 225
Electrical data:	
Input voltage	12–24 V DC (± 10%)
Output voltage	12–24 V DC (± 10%)
Output current	12 V / 12.5 A 24 V / 6.25 A
Output power	Max. 150 W
Control input	0–10 V DC (0 V: off / 10 V: on / open: on)
Overload protection	Yes (red indicator LED activated / output: 0 V)
Temperature protection	Yes (red indicator LED activated / output: 0 V)
Short-circuit protection	Yes (red indicator LED activated / output: 0 V)
Fault disconnection	Reset by disconnection of the input voltage
EMC conformity	EN55015
Mechanical data:	
Weight	310 g
Housing material	Hard PVC
Fire protection class	B1 (according to DIN 4102)
Control cable	H03VV-F, 2 x 0.75 mm ² / 1,000 mm
Input/output cable	Stranded wire, halogen-free, 1 x 2.5 mm ² / 750 mm
Dimensions (L x W x H)	90 x 46 x 32 mm
Housing colour	White

All values refer to an ambient temperature of +25 °C.

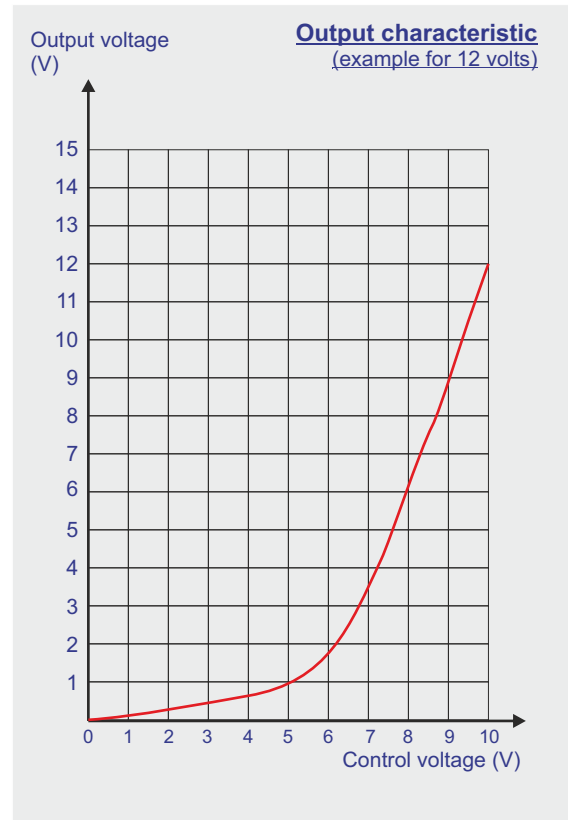

Technical modifications reserved. Content is protected by copyright.

January 2019 L118-c/01/2019