

EVG LED 12/30 (Extra-low voltage)

Electrical data





Operating mode:	Constant voltage
Output voltage:	12 V
Output current:	2.5 A max.
Output power:	30 W max.
Input voltage:	180–260 V AC / 50–60 Hz
Input current:	0.15 A max.
Power factor:	> 0.95
No-load power:	< 0.5 W
Efficiency:	> 85%
Protection class:	II
Degree of protection:	IP67
EMC emission:	EN 55015, EN 61000-3-2
EMC immunity:	EN 61547
Protective functions:	Short-circuit/open-circuit/overload
Ambient temperature:	-25 °C to 55 °C

Other data

Housing:	Kömadur, white
Dimensions (L x W x H):	175 x 46 x 17 mm
Weight:	300 g
Conformity:	CE, RoHS
Article number:	5 1225 014



□ ▽ ▽ ▽ ⊕ RoHS IP67 CE

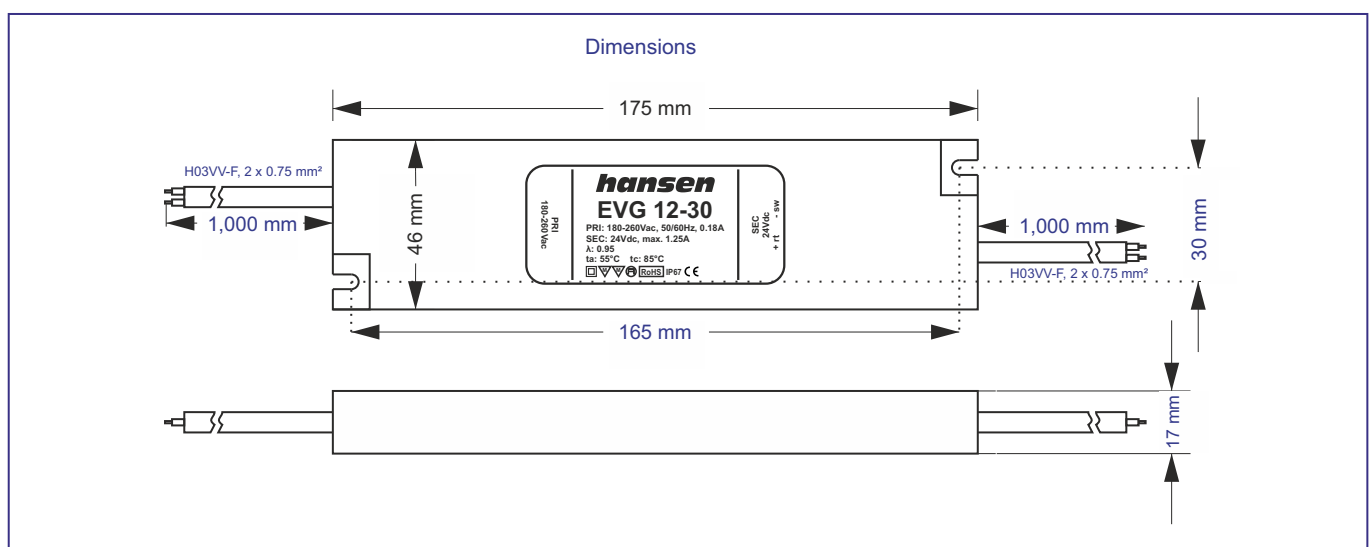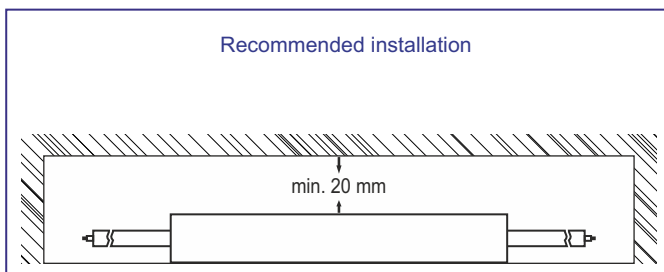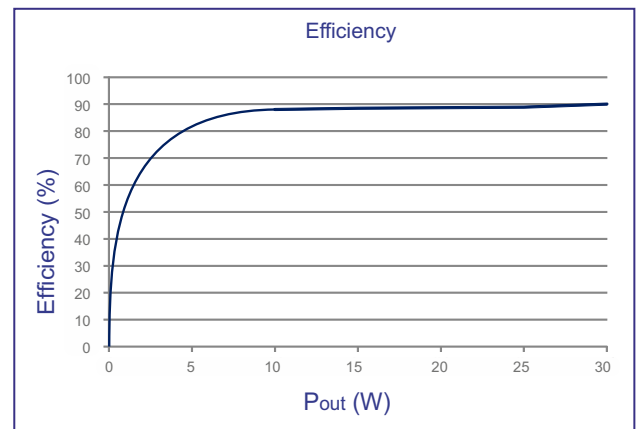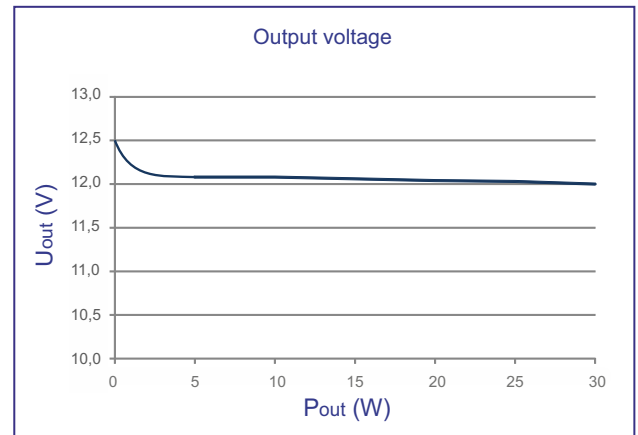

Technical modifications reserved. Content is protected by copyright.

January 2019 ELV-12-30/01/2019