


EVG LED 24/25 (Extra-low voltage) plug-in power supply


General data:	
Degree of protection	IP30
Protection class	III
Conformity	CE
Operating temperature	0°C to 40°C
Article no. white	5 2425 002
Article no. black	5 2425 003
Electrical data:	
Input voltage	100 - 240 V 50/60 Hz
Input current	0,55 A
Output voltage	24 Volt (+/- 5%)
Output current	1.04 A max.
Output power	25 W max.
Residual ripple	200 mV
Voltage withstand	AC: 3,000 V
Insulation resistance	DC: 500 V
Short-circuit protection	Yes / automatic reset
Overload protection	Yes
Mechanical data:	
Weight	125 g
Housing material	94V-0 / ABS+PC
Size (L x W x H)	83 x 47 x 33 mm
Output cable	Lenght: 1,500 mm / AWG 22
Housing colours	White, black
DC plug	Inside: 1.75 mm / outside: 4.75 mm Lenght: 9.5 mm

All values refer to an ambient temperature of +25 °C.

Output characteristic

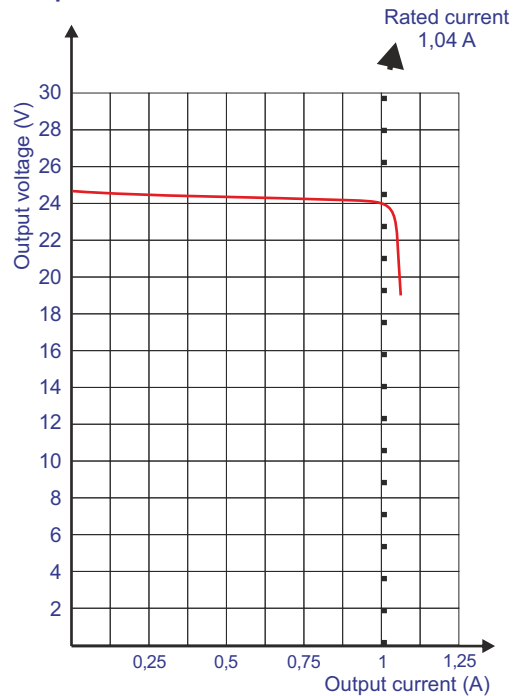

Housing colour: white or black

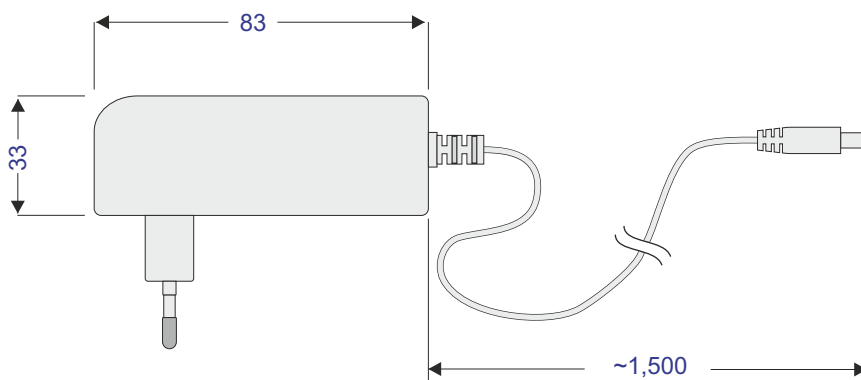

Output cable:
AWG 24 with
DC plug

(All dimensions in millimetre)



Technical modifications reserved. Content is protected by copyright.

January 2019 ELV-plug-in-24-25/01/2019