

## Radar Indoor 200 mm - 24 V LED Circuit Board

LED circuit board for the illumination of flat light boxes for indoor use

Very large radiation angle (170°) with an LED spacing of 200 mm for boxes with a depth of up to 80 mm.


Total run length per power supply 20 m.

Quick and easy installation with insulation displacement connectors and double-sided adhesive tape on the back of the strip.



The circuit board is supplied on reels with a maximum length of 12 m.

Available colour temperatures: 3,000 K | 4,000 K | 5,000 K | 6,500 K

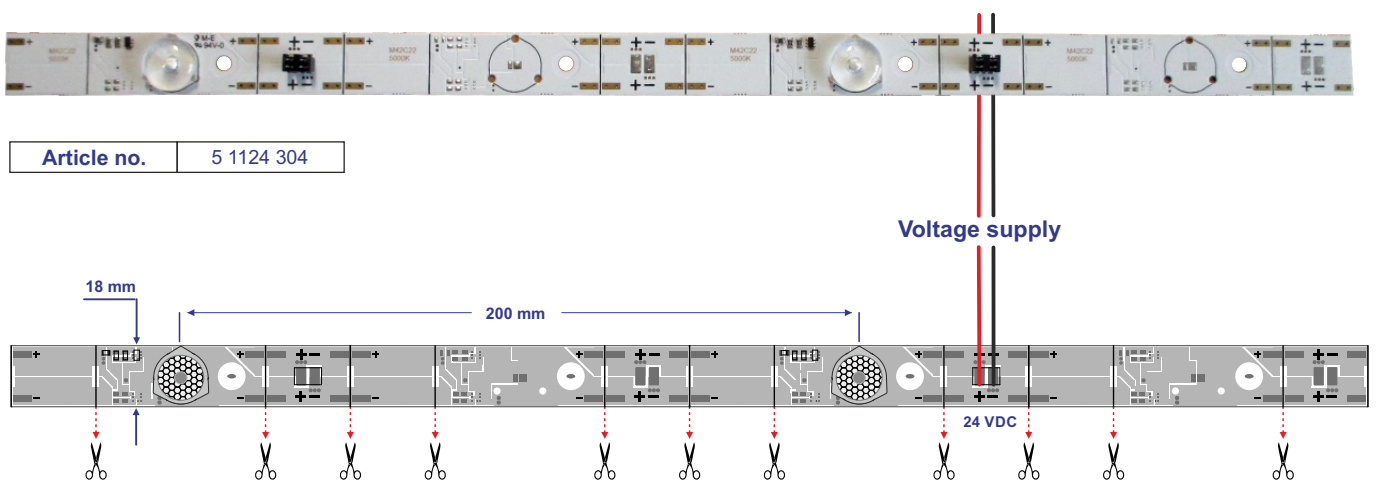

Article no.	5 1124 304
-------------	------------

Voltage supply

18 mm



200 mm

24 VDC


Length: 400 mm

Circuit board can be split here

### Connection:



The cables are pushed into an insulation displacement connector using a special tool (see installation instructions).  
**Only use suitable cables (see "accessories" below).**



### Technical data (circuit board):

Type	Dimensions (mm)	LED spacing (mm)	No. of LEDs	Splittable every (mm)	Operating voltage (V)	Wattage per c. board (W)	Wattage per metre (W)	Max. length per power supply (m)
Radar Indoor 200	400 x 18	200 mm	2	100	24	2,4	6	20

### Photometric data (circuit board):

Colour temp.	3,000 K	4,000 K	5,000 K	6,500 K	Colour rendering
lm/m	580	605	605	605	CRI 80

### Accessories

#### Connecting cable:

Red	5 0001 073
Black	5 0001 074

#### Tool and insert



Article no.	5 3000 151
Article no.	5 3000 150